

www.hengtonggroup.com/en

INDOOR OPTICAL FIBER CABLE



Hengtong Optic-Electric Co., Ltd.
Stock Code: 600487
No. 2288, North Zhongshan Rd.,
Wujiang District, Suzhou City, Jiangsu Province, China
Website: www.hengtonggroup.com/en
Email: info@hengtonggroup.com
Tel: +86 512 6395 7850
Fax: +86 512 6395 7922



@ Hengtong Group



@ Hengtong Group




@ Hengtong Group



Introduction

Company introduction	01
Product overview	03
Global service network	29

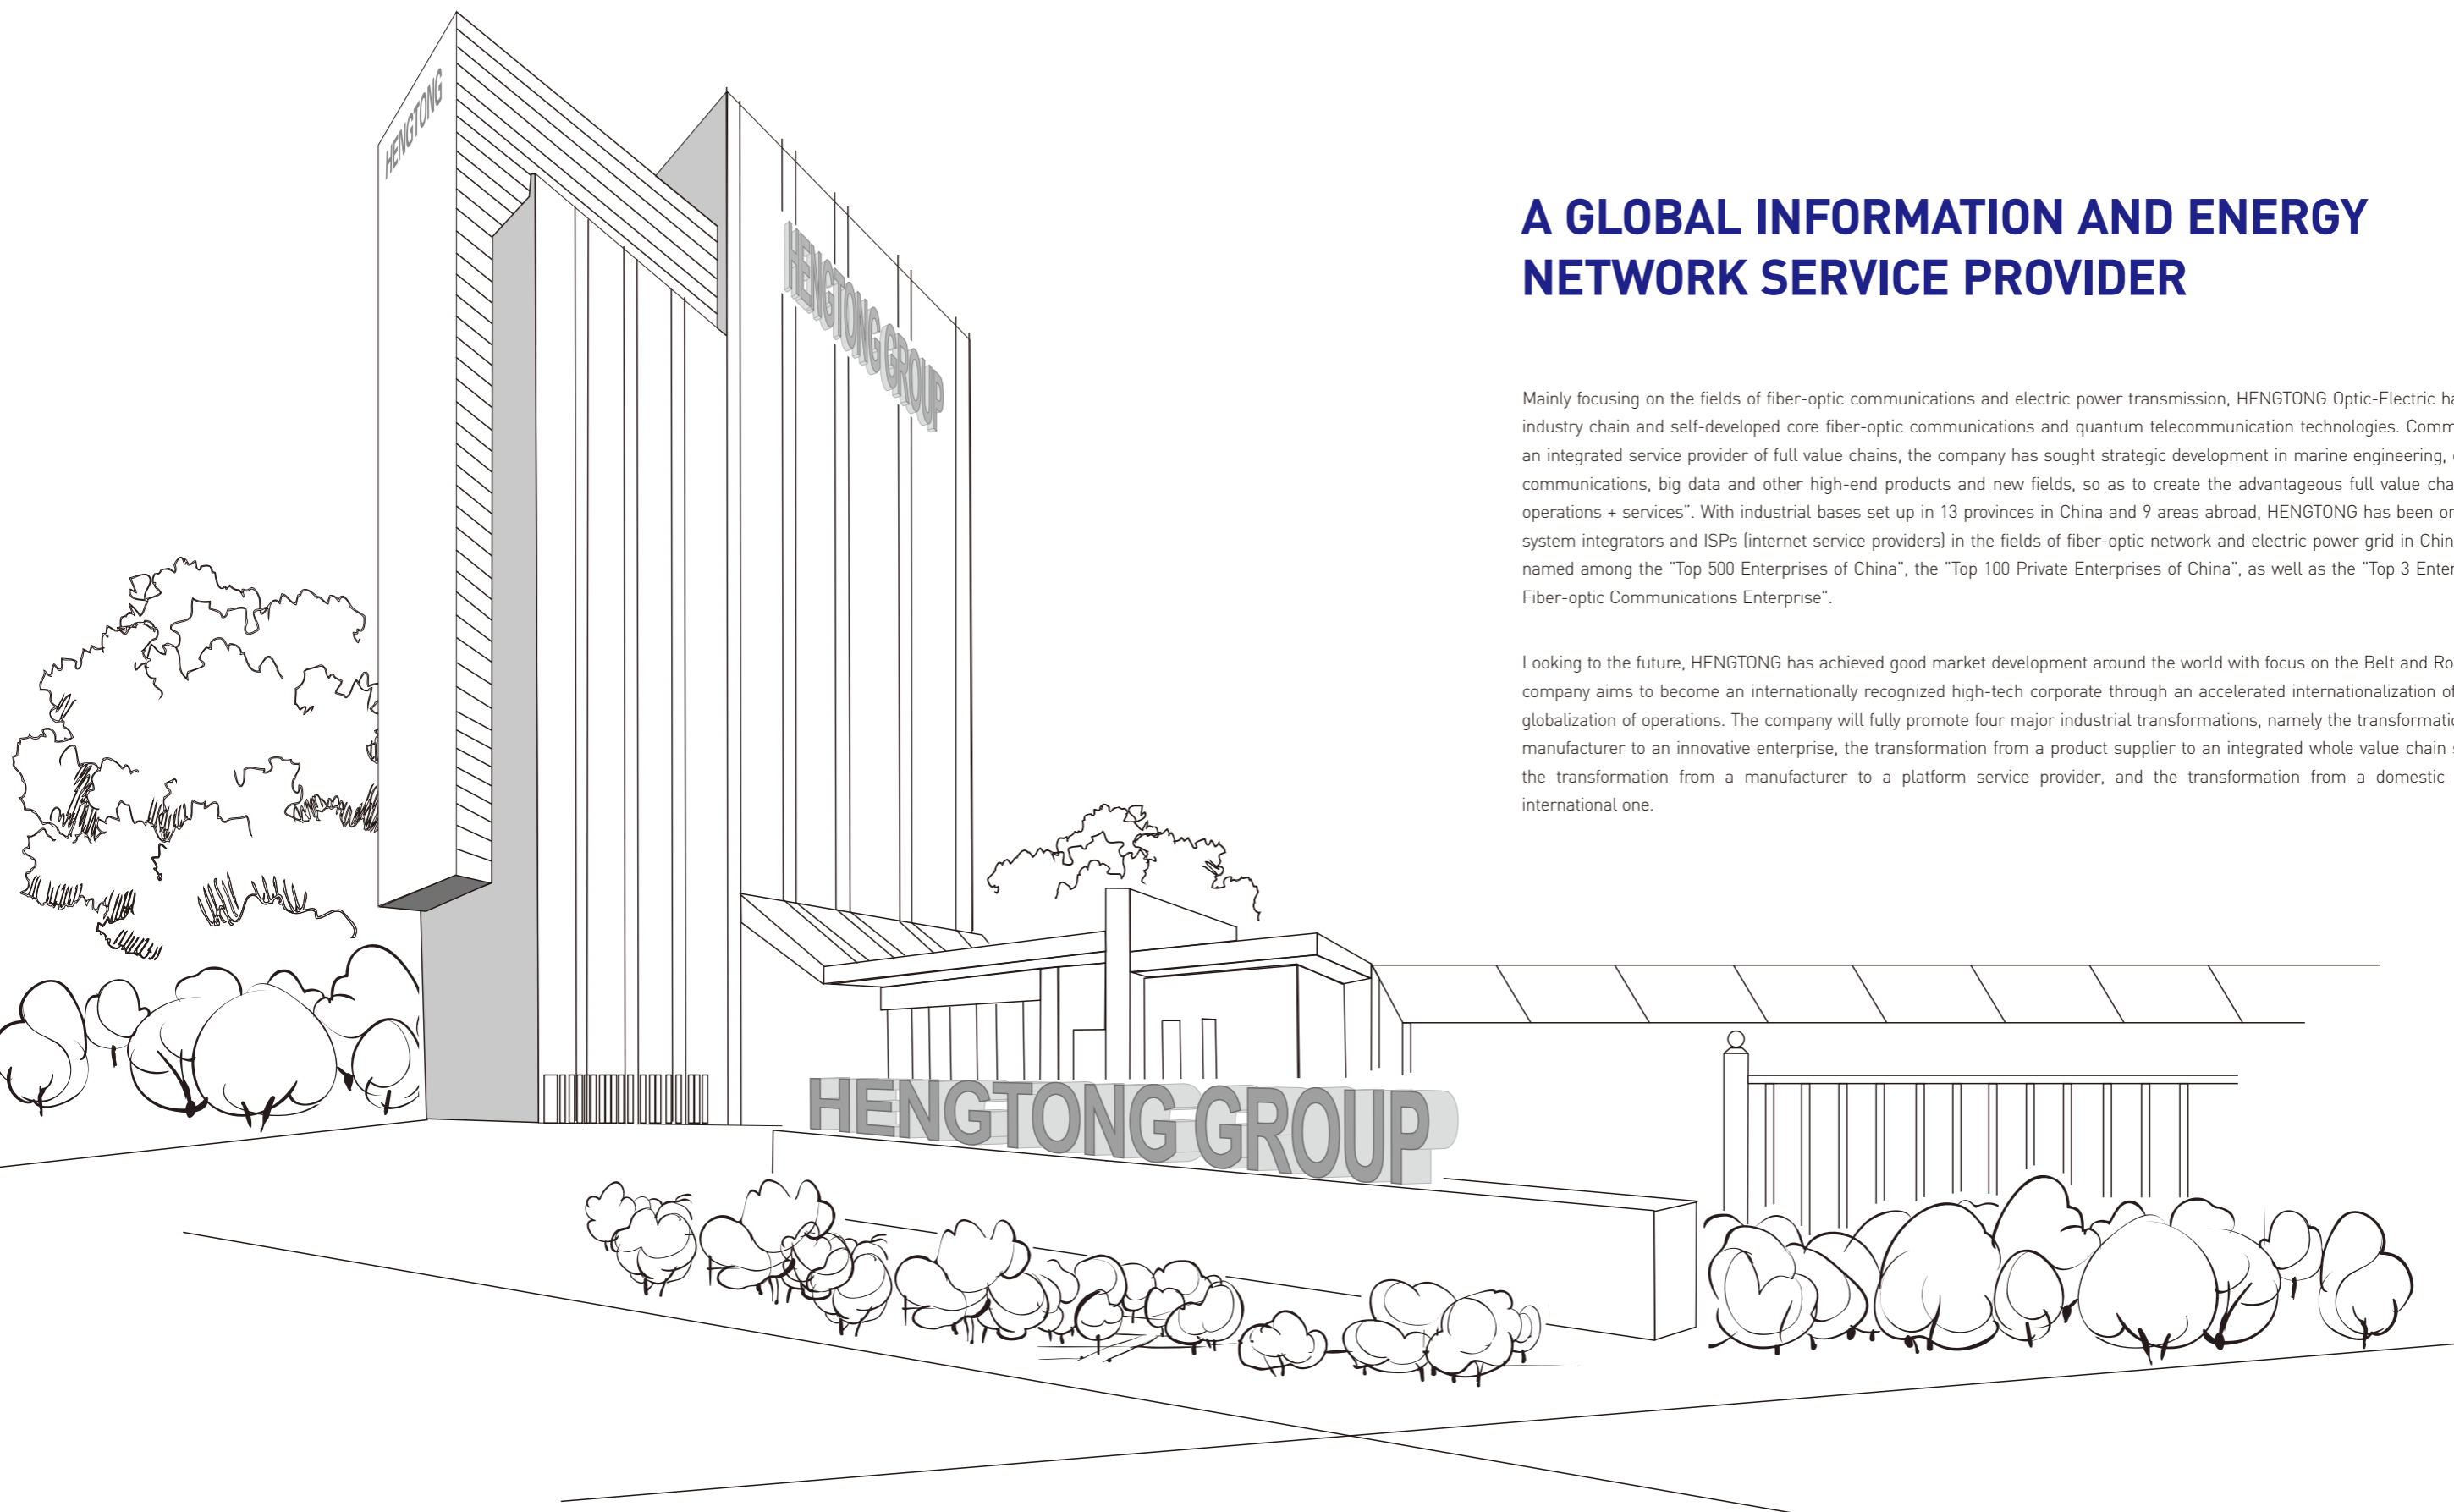

A GLOBAL INFORMATION AND ENERGY NETWORK SERVICE PROVIDER

Mainly focusing on the fields of fiber-optic communications and electric power transmission, HENG TONG Optic-Electric has built up a full industry chain and self-developed core fiber-optic communications and quantum telecommunication technologies. Committed to building an integrated service provider of full value chains, the company has sought strategic development in marine engineering, quantum secure communications, big data and other high-end products and new fields, so as to create the advantageous full value chain of "product + operations + services". With industrial bases set up in 13 provinces in China and 9 areas abroad, HENG TONG has been one of the leading system integrators and ISPs (internet service providers) in the fields of fiber-optic network and electric power grid in China, and has been named among the "Top 500 Enterprises of China", the "Top 100 Private Enterprises of China", as well as the "Top 3 Enterprises of Global Fiber-optic Communications Enterprise".


Looking to the future, HENG TONG has achieved good market development around the world with focus on the Belt and Road Initiative. The company aims to become an internationally recognized high-tech corporate through an accelerated internationalization of production and globalization of operations. The company will fully promote four major industrial transformations, namely the transformation from an R&D manufacturer to an innovative enterprise, the transformation from a product supplier to an integrated whole value chain service provider, the transformation from a manufacturer to a platform service provider, and the transformation from a domestic company to an international one.

Contents

- Tight Buffered Fiber**
Interconnect Cable 05
- Simplex Round Indoor Cable**
Interconnect Cable 06
- Duplex Flat Indoor Cable**
Interconnect Cable 07
- Duplex Flat Indoor Cable**
Interconnect Cable 08
- Multi Fibers Distribution Indoor Cable I**
Indoor Cabling System 09
- Multi Fibers Distribution Indoor Cable II**
Indoor Cabling System 10
- Multi Fibers Breakout Indoor Cable**
Indoor Cabling System 11
- Optical Fiber Ribbon Indoor Cable**
Indoor Cabling System 12
- Bow-type Drop Cable**
FTTx Drop Cable 13
- Round Type Drop Cable**
FTTx Drop Cable 14
- Armored Bow-type Drop Cable**
FTTx Drop Cable 15
- Optical Cable For Wireless Remote Radio Unit I**
FTTx Drop Cable 16

- Optical Cable For Wireless Remote Radio Unit II**
FTTx Drop Cable 17
- Optical Cable For Wireless Remote Radio Unit III**
FTTx Drop Cable 18
- Optical Cable For Wireless Remote Radio Unit IV**
FTTx Drop Cable 19
- Optical Cable For Wireless Remote Radio Unit V**
FTTx Drop Cable 20
- Optical Cable For Wireless Remote Radio Unit VI**
FTTx Drop Cable 21
- Optical Cable For Wireless Remote Radio Unit VII**
FTTx Drop Cable 22
- Easy Branches Indoor Riser Cable I**
Indoor Multi-fiber Riser Cable 23
- Easy Branches Indoor Riser Cable II**
Indoor Multi-fiber Riser Cable 24
- MPO Patch Cord I**
MPO Jumper Wire 25
- MPO Patch Cord II**
MPO Jumper Wire 26
- MPO Patch Cord III**
MPO Jumper Wire 27

Tight Buffered Fiber Interconnect Cable

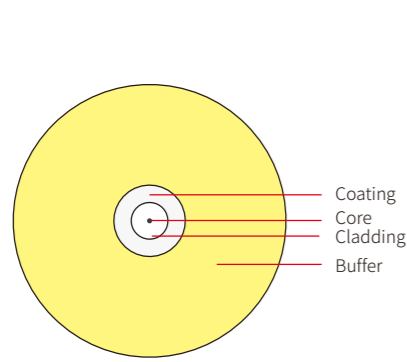

Technical data


Fiber: Up to 1, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Tight buffered fiber
Strength Member: Non
Sheath Options: LSZH, PVC, Nylon, etc.
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Good flexibility, suitable for making patch cord and pigtail;
- Small bending radius, compact and light weight.

Applications

Element of indoor cable;
 Pigtail and patch cord in communication equipments.



Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
Tight Buttffer Fiber	1	0.5	/	/	100	50	60	30
Tight Buttffer Fiber	1	0.6	/	/	100	50	60	30
Tight Buttffer Fiber	1	0.7	/	/	100	50	60	30
Tight Buttffer Fiber	1	0.8	/	/	100	50	60	30
Tight Buttffer Fiber	1	0.9	/	/	100	50	60	30

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Simplex Round Indoor Cable Interconnect Cable

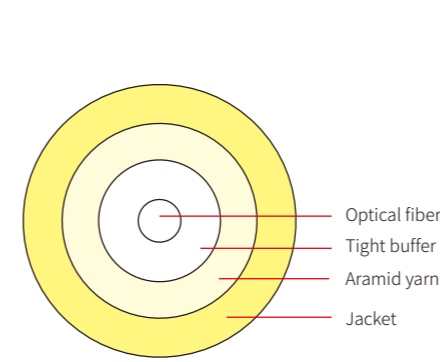

Technical data


Fiber: Up to 1, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Simplex cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Good flexibility, suitable for making patch cord and pigtail;
- Small bending radius, compact and light weight;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling;
 Pigtail and patch cord in communication equipments.

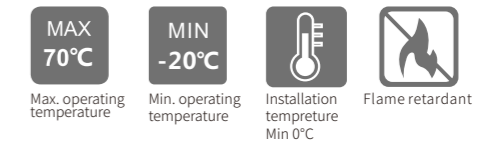

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJFJZY(V)	1	1.5	60	30	500	200	60	30
GJFJZY(V)	1	1.6	60	30	500	200	60	30
GJFJZY(V)	1	1.8	60	30	500	200	60	30
GJFJZY(V)	1	2.0	60	30	500	200	60	30
GJFJZY(V)	1	2.4	120	60	500	200	60	30
GJFJZY(V)	1	2.8	120	60	500	200	60	30
GJFJZY(V)	1	3.0	120	60	500	200	60	30

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Duplex Flat Indoor Cable Interconnect Cable

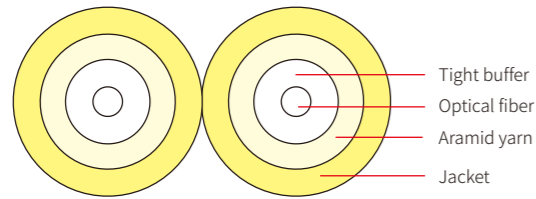

Technical data

Fiber: Up to 2, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Duplex cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Good flexibility, suitable for making patch cord and pigtail;
- Small bending radius, compact and light weight;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling;
 Double-core pigtail and patch cord;
 Working as connection cable in equipments.



Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable dimension (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJFBH(V)	2	1.6×3.3	120	60	500	200	60	30
GJFBH(V)	2	1.8×3.7	120	60	500	200	60	30
GJFBH(V)	2	2.0×4.1	120	60	500	200	60	30
GJFBH(V)	2	2.4×4.9	240	120	500	200	60	30
GJFBH(V)	2	2.5×5.1	240	120	500	200	60	30
GJFBH(V)	2	2.8×5.7	240	120	500	200	60	30
GJFBH(V)	2	3.0×6.1	240	120	500	200	60	30

Notes: 1. The above parameters are typical value; 2. The cable spec can be designed according to customer's requirement.

Duplex Flat Indoor Cable Interconnect Cable

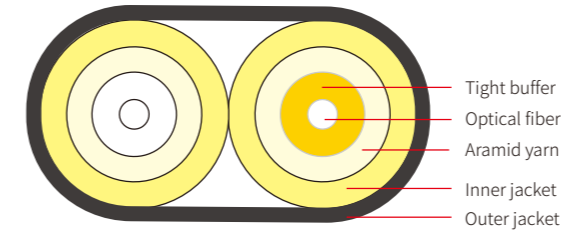

Technical data

Fiber: Up to 2, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Duplex cable
Strength Member: Aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards




Features

- Good flexibility, easy for splicing;
- Small bending radius, small diameter and light weight;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling;
 Double-core pigtail and patch cord;
 Working as connection cable in equipments.

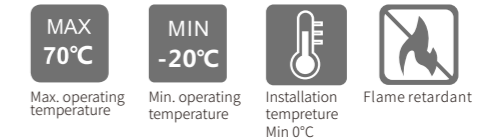

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable dimension (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJFBHH	2	3.1×4.9	120	60	1000	400	20H	10H
GJFBHH	2	4.0×7.0	240	120	1000	400	20H	10H
GJFBHH	2	4.4×7.4	240	120	1000	400	20H	10H

Notes: 1. H denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Multi Fibers Distribution Indoor Cable I Indoor Cabling System

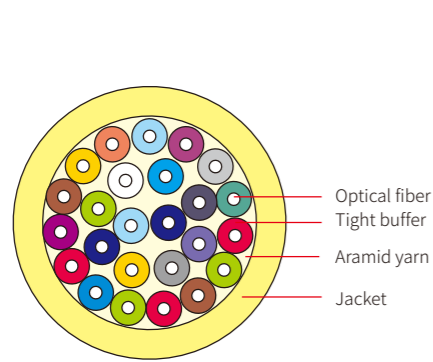

Technical data


Fiber: Up to 24, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Multi-fiber distribution cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Large number of cores, high density, can be divided into several independent optical units;
- Flexible, excellent stress and strain properties;
- Flame retardant outer sheath offering good protection;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Horizontal and vertical cabling inside buildings;
 Multi-core patch cord;
 As transmission cable in transmission equipment.



Fiber Transmission Performance


Cabled Optical fiber	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)				Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term		Long term		Short term	Long term	Dynamic	Static
			Horizontal	Vertical	Horizontal	Vertical				
GJPFJH(V)	2	3.6	300	400	150	200	1000	500	20D	10D
GJPFJH(V)	4	4.7	440	660	220	330	1000	500	20D	10D
GJPFJH(V)	6	5.2	440	660	220	330	1000	500	20D	10D
GJPFJH(V)	8	5.8	440	660	220	330	1000	500	20D	10D
GJPFJH(V)	12	6.3	440	660	220	330	1000	500	20D	10D
GJPFJH(V)	16	6.9	660	1320	330	660	1000	500	20D	10D
GJPFJH(V)	18	7.0	660	1320	330	660	1000	500	20D	10D
GJPFJH(V)	20	8.0	660	1320	330	660	1000	500	20D	10D
GJPFJH(V)	24	8.0	660	1320	330	660	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Multi Fibers Distribution Indoor Cable II Indoor Cabling System

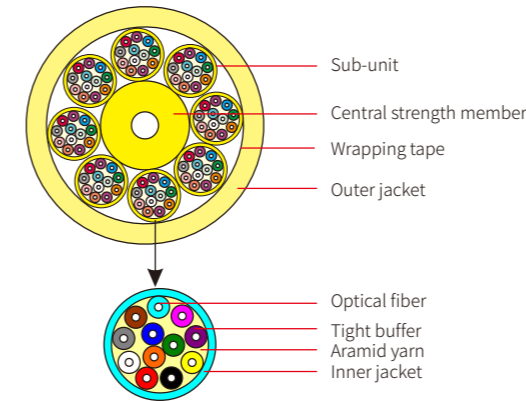

Technical data


Fiber: Up to 144, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Multi-fiber distribution cable
Strength Member: Aramid yarn and FRP
Sheath Options: Double LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Large number of cores, high density, can be divided into several independent optical units;
- Flexible, excellent stress and strain properties;
- Flame retardant outer sheath offering good protection;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Horizontal and vertical cabling inside buildings;
 As transmission cable in transmission equipment.

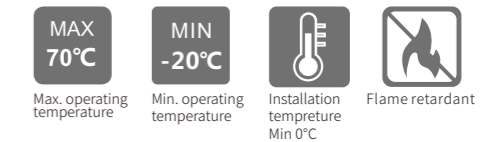

Fiber Transmission Performance

Cabled Optical fiber	62.5µm (850nm/1300nm)	50µm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Sub-unit		Cable diameter (mm)	Tensile Strength(N)				Crush Resistance(N/100mm)		Minimum bend radius(mm)	
		Fiber counts	Unit counts		Short term		Long term		Short term	Long term	Dynamic	Static
					Horizontal	Vertical	Horizontal	Vertical				
GJPFJH(V)	24	6	4	4.5	1200	600	1200	600	20D	10D		
GJPFJH(V)	36	6	6	4.5	1600	800	1200	600	20D	10D		
GJPFJH(V)	48	12	4	5.5	1600	800	1200	600	20D	10D		
GJPFJH(V)	72	12	6	5.5	2000	1000	1200	600	20D	10D		
GJPFJH(V)	96	12	8	5.5	3000	1700	1200	600	20D	10D		
GJPFJH(V)	144	12	12	5.5	3500	2000	1200	600	20D	10D		

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Multi Fibers Breakout Indoor Cable

Indoor Cabling System

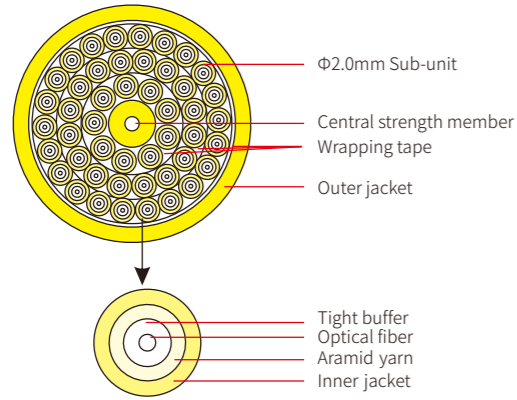

Technical data

Fiber: Up to 60, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Multi-fiber breakout cable
Strength Member: Aramid yarn and FRP
Sheath Options: Double LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards



Features

- Large number of cores, high density, can be divided into several independent optical units;
- Flexible, excellent stress and strain properties;
- Flame retardant outer sheath offering good protection;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Multi-core patch cord;
 Indoor cabling, especially used as breakout cable;
 As transmission cable in transmission equipment.

Max. operating temperature

Min. operating temperature

Installation temperature
 Min 0°C

Flame retardant

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Sub-unit diameter (mm)	Cable structure	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
					Short term	Long term	Short term	Long term	Dynamic	Static
GJBFJH(V)	4	2.0	1+4	7.5	400	200	1000	500	20D	10D
GJBFJH(V)	6	2.0	1+6	8.5	800	400	1000	500	20D	10D
GJBFJH(V)	8	2.0	1+8	9.5	660	330	1000	500	20D	10D
GJBFJH(V)	12	2.0	1+12	12.0	1000	500	1000	500	20D	10D
GJBFJH(V)	24	2.0	1+9+15	14.5	1800	900	1000	500	20D	10D
GJBFJH(V)	36	2.0	1+6+12+18	17.5	2200	1100	1000	500	20D	10D
GJBFJH(V)	48	2.0	1+10+16+22	19.5	3000	1500	1000	500	20D	10D
GJBFJH(V)	60	2.0	1+6+12+18+24	22.0	3600	1800	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Fiber Ribbon Indoor Cable

Indoor Cabling System

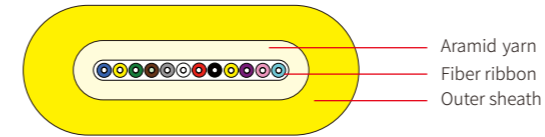

Technical data

Fiber: Up to 12
Fiber Types: Single-mode or multimode
Cable Types: Ribbon fiber
Strength Member: Aramid yarn
Sheath Options: Single LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards



Features

- High fiber density, small size, light weight, good looking and compact structure;
- Easy for installation and splicing, branching and flame retardant;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Indoor cabling;
 Ribbon patch cord and ribbon pigtail;
 As flexible connection cable between equipments.

Max. operating temperature

Min. operating temperature

Installation temperature
 Min 0°C

Flame retardant

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Cable dimension (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJDFH(V)	4	2.2×3.2	220	100	500	250	30H	15H
GJDFH(V)	6	2.2×4.2	220	100	500	250	30H	15H
GJDFH(V)	8	2.2×4.2	220	100	500	250	30H	15H
GJDFH(V)	12	2.2×4.7	220	100	500	250	30H	15H

Notes: 1. H denotes the height of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Bow-type Drop Cable

FTTx Drop Cable

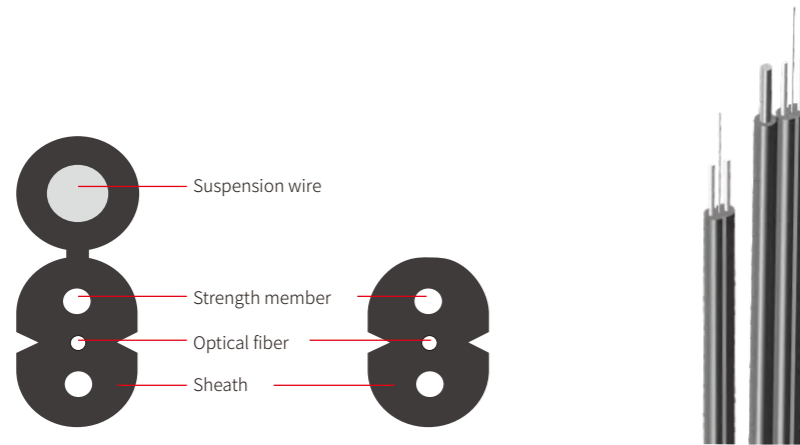

Technical data


Fiber: Up to 12
Fiber Types: Single-mode or multimode
Cable Types: Bow-type drop cable
Strength Member: (K)FRP or steel wire
Sheath Options: Single LSZH sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Compact and light weight, low purchasing and construction costs;
- Easy connect without splicing, fast and convenient;
- Excellent tensile and crush performance, the span distance for self-support type can be up to 50 meters;
- Flame retardant LSZH jacket meets relevant fire protection requirements in indoor environment;
- High carbon steel messenger wire enables the self-support type to have excellent tensile strength.

Applications

Used in indoor/outdoor cabling;
 Used as drop cable.

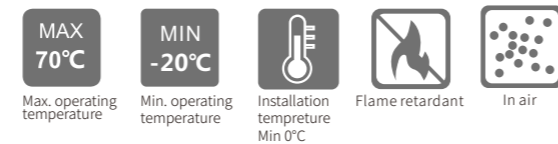

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Cable dimension (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJXH	2	1.6×2.0	200	100	2200	1000	30	15
GJXFH	2	1.6×2.0	80	40	1000	500	30	15
GJYXCH	2	1.6×3.7	600	300	2200	1000	240	120
GJYXFCH	2	1.6×3.7	600	300	2200	1000	240	120
GJXH	4	3.0×2.0	200	100	2200	1000	30	15
GJXFH	4	3.0×2.0	80	40	1000	500	30	15
GJYXCH	4	5.2×2.0	600	300	2200	1000	240	120
GJYXFCH	4	5.2×2.0	600	300	2200	1000	240	120

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Round Type Drop Cable

FTTx Drop Cable

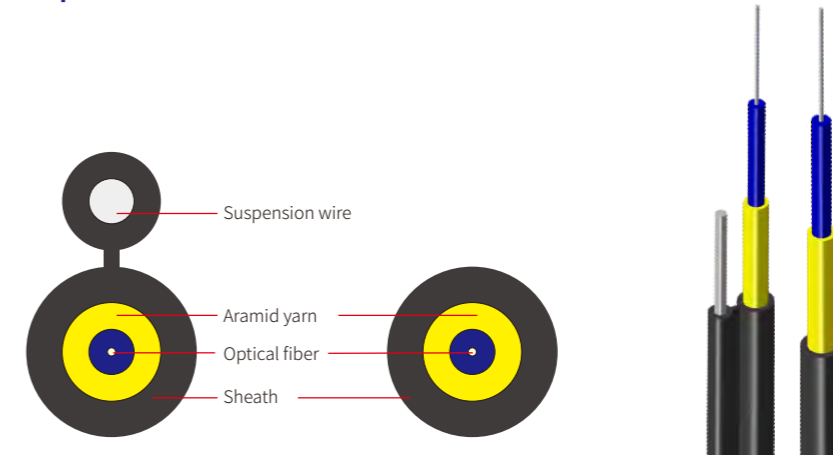

Technical data


Fiber: Up to 4, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Round drop cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH sheath
Operating Temperature: -20°C~+70°C
Compliances: In Accordance with IEC, ITU and EIA standards

Features

- Compact and light weight, low purchasing and construction costs;
- Easy connect without splicing, fast and convenient;
- Excellent tensile and crush performance, the span distance for self-support type can be up to 50 meters;
- Flame retardant LSZH jacket meets relevant fire protection requirements in indoor environment;
- High carbon steel messenger wire enables the self-support type to have excellent tensile strength.

Applications

Used in indoor/outdoor cabling;
 Used as drop cable.

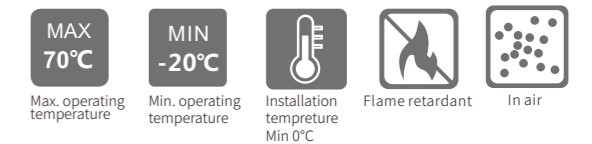

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJFJH	1	2.5	150	80	1000	500	20D	10D
GJYFJH	1	3.0	300	150	1000	500	20D	10D
GJYFJCH	2	3.5×6.5	600	300	1000	500	20D	10D
GJYFJCH	4	3.7×6.5	600	300	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Armored Bow-type Drop Cable FTTx Drop Cable

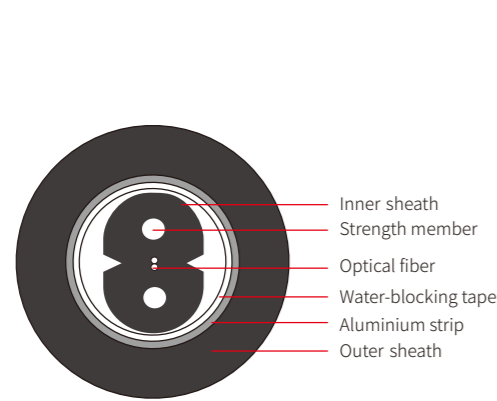

Technical data


Fiber: Up to 4
Fiber Types: Single-mode or multimode
Cable Types: Drop cable for duct
Strength Member: (K)FRP or steel wire
Sheath Options: Inner LSZH sheath, outer PE sheath
Operating Temperature: -20°C~+70°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Excellent mechanical and environmental characteristics;
- Easily strip and splice, simplify the installation and maintenance;
- From outdoor duct application to indoor wiring.

Applications

Used in indoor/outdoor cabling;
 Drop in duct.



Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Unit dimension (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GYPHA	1	2.0×3.0	6.8	200	100	2200	1000	20D	10D
GYPHA	2	2.0×3.0	6.8	200	100	2200	1000	20D	10D
GYPHA	4	2.0×3.0	6.8	200	100	2200	1000	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit I FTTx Drop Cable

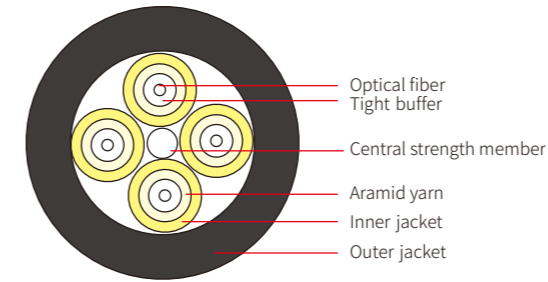

Technical data


Fiber: Up to 4, tight buffered fiber"
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: FRP and aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

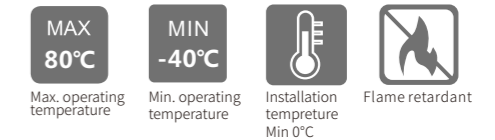

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GYFJH	2	7.0	500	250	2200	1100	20D	10D
GYFJH	4	7.0	600	300	2200	1100	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit II FTTx Drop Cable

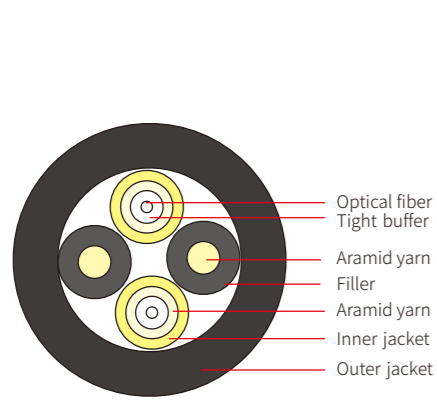

Technical data

Fiber: Up to 4, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

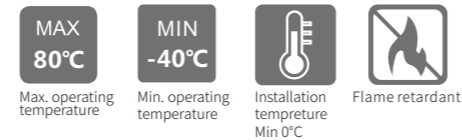

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
	Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GYFJH	2	7.0	400	200	2200	1100	20D	10D
GYFJH	4	7.0	400	200	2200	1100	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit III FTTx Drop Cable

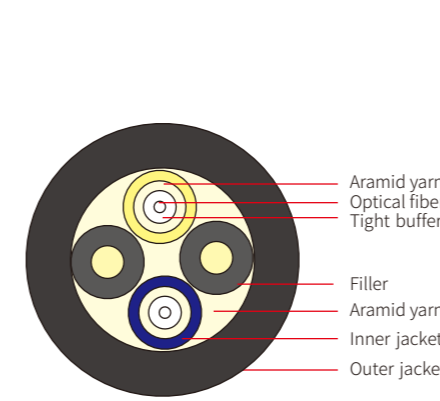

Technical data

Fiber: Up to 4, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

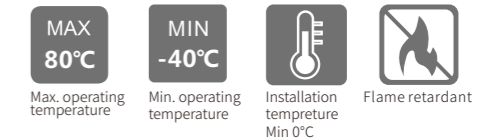

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
	Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GYFJH	2	7.0	600	300	2200	1100	20D	10D
GYFJH	4	7.0	600	300	2200	1100	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit IV FTTx Drop Cable

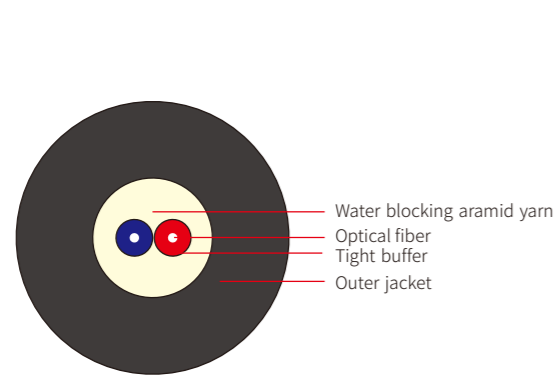

Technical data

Fiber: Up to 4, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.



Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GYFJZY	2	7.0	400	200	3000	1500	20D	10D
GYFJZY	4	7.0	400	200	2200	1100	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit V FTTx Drop Cable

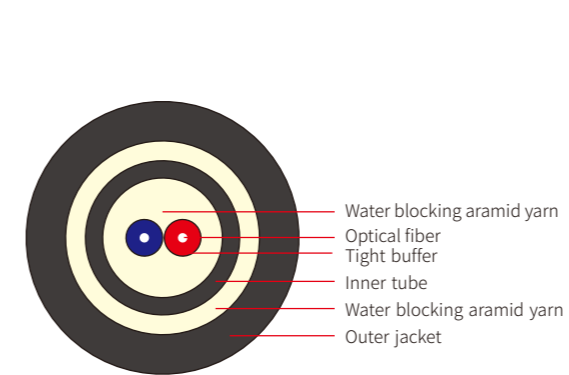

Technical data

Fiber: Up to 2, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards




Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

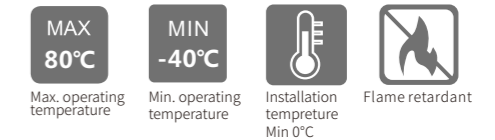

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Central tube diameter (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GYFXJH	2	3.0	4.8	400	200	1000	500	20D	10D
GYFXJH	2	3.0	7.0	400	200	2200	1100	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit VI FTTx Drop Cable

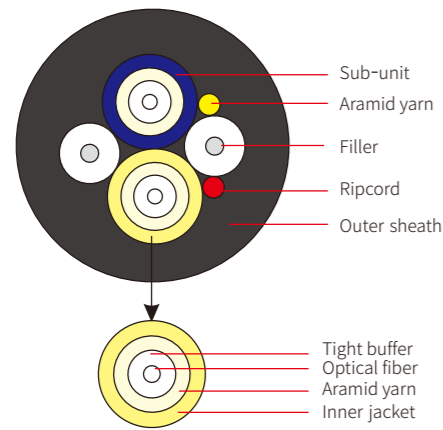

Technical data

Fiber: Up to 2, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Inner LSZH sheath, outer PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In accordance with IEC, ITU and EIA standards



Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- All dielectric structure design, without electromagnetic induction effect.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

MAX
70°C

Max. operating temperature

MIN
-20°C

Min. operating temperature

Installation temperature
Min 0°C

Flame retardant

Fiber Transmission Performance


Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Sub-unit diameter (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GJBFJV	2	2.5	7.0	400	200	2000	1000	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Optical Cable For Wireless Remote Radio Unit VII FTTx Drop Cable

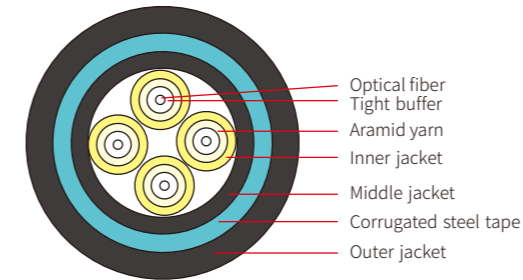

Technical data

Fiber: Up to 4, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Remote radio unit cable
Strength Member: Aramid yarn
Sheath Options: Double LSZH sheath
Operating Temperature: -40°C~+80°C
Compliances: In accordance with IEC, ITU and EIA standards



Features

- Excellent mechanical and environmental performance;
- Small diameter, small bending radius and light-weight;
- Flame retardant outer sheath offering good protection; UV and lighting resistance;
- Good anti-rodent performance.

Applications

Specially designed for cabling in base station;
 Patch cord in communication equipments;
 Indoor/outdoor horizontal and vertical cabling.

MAX
80°C

Max. operating temperature

MIN
-40°C

Min. operating temperature

Installation temperature
Min 0°C

Flame retardant

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Unit diameter (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GYJH53	1	2.0/7.0	10.5	500	250	2200	1000	20D	10D
GYJH53	2	2.0/7.0	10.5	500	250	2200	1000	20D	10D
GYJH53	4	2.0/7.0	10.5	500	250	2200	1000	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Easy Branches Indoor Riser Cable I

Indoor Multi-fiber Riser Cable

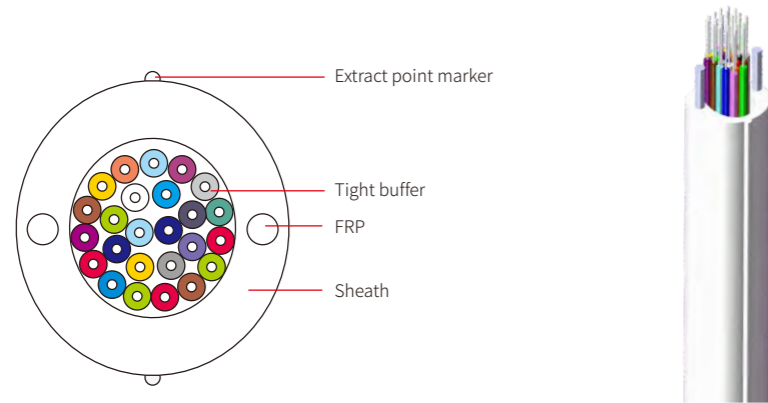

Technical data


Fiber: Up to 24, tight buffered fiber
Fiber Types: Single-mode or multimode
Cable Types: Multi-fiber riser cable
Strength Member: Parallel FRP
Sheath Options: Single LSZH sheath
Operating Temperature: -5°C~+60°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Excellent mechanical and environmental performance;
- All dielectric and dry core structure improve the efficiency and cleanness in deployment;
- Small diameter, light weight, small occupied space;
- The FRP makes cable strong tension and anti-bend advantages;
- Data transmission with high reliability, low cost, easy to connect, etc.

Applications

Indoor horizontal and vertical cabling.



Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	FRP diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GJPFJH	2	7.5	1.2	500	250	1000	500	20D	10D
GJPFJH	4	7.5	1.2	500	250	1000	500	20D	10D
GJPFJH	6	8.0	1.2	500	250	1000	500	20D	10D
GJPFJH	8	8.0	1.2	500	250	1000	500	20D	10D
GJPFJH	12	9.0	1.2	500	250	1000	500	20D	10D
GJPFJH	16	10.5	1.2	500	250	1000	500	20D	10D
GJPFJH	18	10.5	1.2	500	250	1000	500	20D	10D
GJPFJH	24	10.5	1.2	500	250	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Easy Branches Indoor Riser Cable II

Indoor Multi-fiber Riser Cable

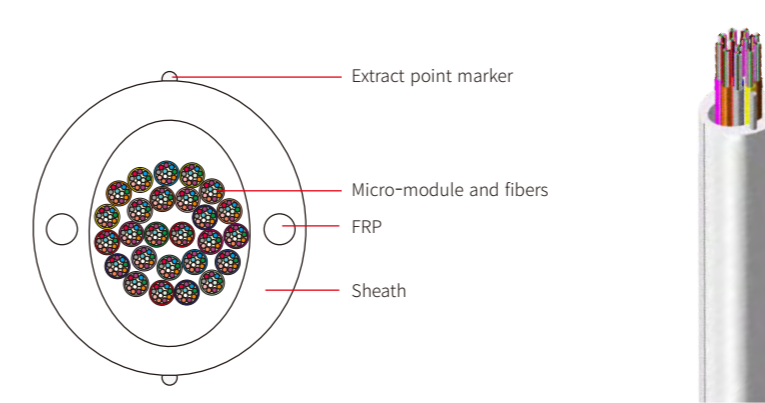

Technical data


Fiber: Up to 288
Fiber Types: Single-mode or multimode
Cable Types: Multi-fiber riser cable
Strength Member: Parallel FRP
Sheath Options: Single LSZH sheath
Operating Temperature: -5°C~+60°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Excellent mechanical and environmental performance;
- All dielectric and dry core structure improve the efficiency and cleanness in deployment;
- Micro modules can be easily stripped off without tools to get the fibers;
- Small diameter, light weight, small occupied space;
- The FRP makes cable strong tension and anti-bend advantages;
- Data transmission with high reliability, low cost, easy to connect, etc.

Applications

Indoor horizontal and vertical cabling.

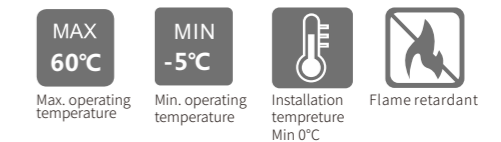

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Sub-unit		FRP diameter (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
		Fiber counts	Unit counts			Short term	Long term	Short term	Long term	Dynamic	Static
GJPFQH	12	4	3	0.9	7.5	500	250	1000	500	20D	10D
GJPFQH	24	6	4	1.1	8.0	500	250	1000	500	20D	10D
GJPFQH	36	6	6	1.1	8.0	500	250	1000	500	20D	10D
GJPFQH	48	12	4	1.3	8.0	500	250	1000	500	20D	10D
GJPFQH	72	12	6	1.3	10.5	500	250	1000	500	20D	10D
GJPFQH	96	12	8	1.3	10.5	500	250	1000	500	20D	10D
GJPFQH	144	12	12	1.3	11.0	500	250	1000	500	20D	10D
GJPFQH	288	12	24	1.3	13.0	500	250	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.


MPO Patch Cord I

MPO Jumper Wire

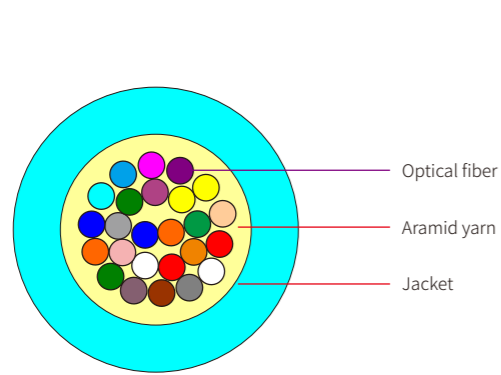

MPO Patch Cord II

MPO Jumper Wire

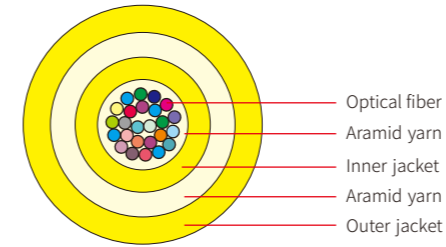

Technical data


Fiber: Up to 24
Fiber Types: Single-mode or multimode
Cable Types: MPO cable
Strength Member: Aramid yarn
Sheath Options: Single LSZH/PVC sheath
Operating Temperature: -20°C~+70°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Extremely high fiber density, very small size, light weight and compact structure;
- Suitable for large capacity data transmission;
- Good flexibility, suitable for making patch cord;
- High strength, good bending property, without gel inside, convenient for splicing and cabling;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling, as fan-out cable.



Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
			Short term	Long term	Short term	Long term	Dynamic	Static
GJFV(H)	2	3.0	250	120	500	250	20D	10D
GJFV(H)	4	3.0	250	120	500	250	20D	10D
GJFV(H)	6	3.0	250	120	500	250	20D	10D
GJFV(H)	8	3.0	250	120	500	250	20D	10D
GJFV(H)	12	3.0	250	120	500	250	20D	10D
GJFV(H)	24	3.5	250	120	500	250	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

Technical data


Fiber: Up to 24
Fiber Types: Single-mode or multimode
Cable Types: MPO cable
Strength Member: Aramid yarn
Sheath Options: LSZH/PVC
Operating Temperature: -20°C~+70°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Extremely high fiber density, small size, light weight and compact structure;
- Suitable for large capacity data transmission;
- Good flexibility, suitable for making patch cord;
- High strength, good bending property, without gel inside, convenient for splicing and cabling;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling, as fan-out cable;
 Indoor horizontal and vertical cabling.

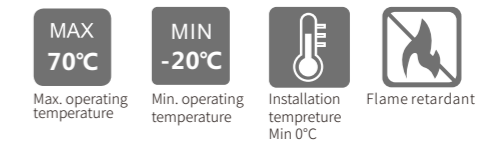

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22


Technical Specification

Cable type	Fiber counts	Central tube dimension (mm)	Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)	
				Short term	Long term	Short term	Long term	Dynamic	Static
GJFXV(H)	2	3	5.5	660	330	1000	500	20D	10D
GJFXV(H)	4	3	5.5	660	330	1000	500	20D	10D
GJFXV(H)	6	3	5.5	660	330	1000	500	20D	10D
GJFXV(H)	8	3	5.5	660	330	1000	500	20D	10D
GJFXV(H)	12	3	5.5	660	330	1000	500	20D	10D
GJFXV(H)	24	3.5	6.0	660	330	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

MPO Patch Cord III

MPO Jumper Wire

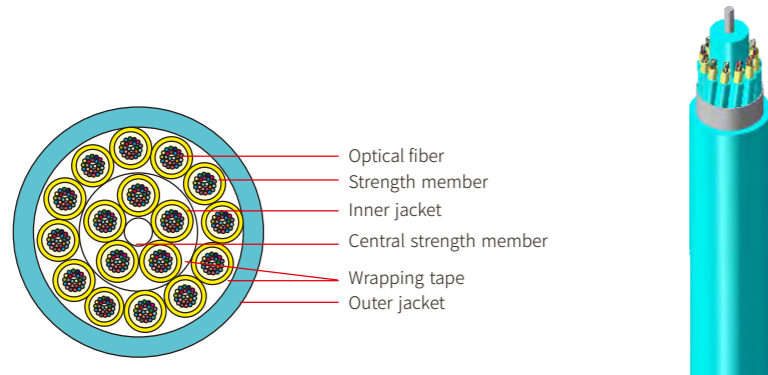

Technical data

Fiber: Up to 288
Fiber Types: Single-mode or multimode
Cable Types: MPO cable
Strength Member: Aramid yarn
Sheath Options: LSZH/PVC
Operating Temperature: -20°C~+70°C
Compliances: In accordance with IEC, ITU and EIA standards

Features

- Extremely high fiber density, small size, light weight and compact structure;
- Suitable for large capacity data transmission;
- Good flexibility, suitable for making patch cord;
- Each individual unit cable has its own aramid yarn as strength member;
- High strength, good bending property, without gel inside, convenient for splicing and cabling;
- Flame retardant outer sheath offering good protection.

Applications

Indoor cabling, as fan-out cable;
 Indoor horizontal and vertical cabling.

MAX
70°C
Max. operating temperature

MIN
-20°C
Min. operating temperature

Installation temperature
Min 0°C

Flame retardant

Fiber Transmission Performance

Cabled Optical fiber	62.5μm (850nm/1300nm)	50μm (850nm/1300nm)	G.652 (1310nm / 1550nm)	G.657 (1310nm / 1550nm)
Max attenuation(dB/km)	3.5/1.5	3.5/1.5	0.4/0.3	0.4/0.3
Typical value(dB/km)	3.0/1.0	3.0/1.0	0.36/0.22	0.36/0.22

Technical Specification

Cable type	Fiber counts	Sub-unit		Cable diameter (mm)	Tensile Strength(N)		Crush Resistance(N/100mm)		Minimum bend radius(mm)		
		Fiber counts	Unit counts		Short term	Long term	Short term	Long term	Dynamic	Static	
GJPFH(V)	24	12	2	3.0	9.5	600	300	1000	500	20D	10D
GJPFH(V)	48	12	4	3.0	9.5	600	300	1000	500	20D	10D
GJPFH(V)	72	12	6	3.0	11.5	800	400	1000	500	20D	10D
GJPFH(V)	96	12	8	3.0	13.5	1000	500	1000	500	20D	10D
GJPFH(V)	144	12	12	3.0	17.5	1500	750	1000	500	20D	10D
GJPFH(V)	288	12	24	3.0	21.0	3000	1500	1000	500	20D	10D

Notes: 1. D denotes the diameter of the cable; 2. The above parameters are typical value; 3. The cable spec can be designed according to customer's requirement.

GLOBAL SERVICE NETWORK

International Representative Offices

Contact Information

info@hengtonggroup.com

Africa Region

DR Congo
Ethiopia
Kenya
Republic of the Congo
Uganda
Zambia

America Region

Argentina
Bolivia
Chile
Colombia
Ecuador
Mexico
Peru

Asia Pacific Region

Australia
Bangladesh
Cambodia
India
Indonesia
Malaysia
Myanmar
Nepal
Pakistan
Philippines
Singapore
Sri Lanka
Taiwan, China
Thailand
Vietnam

Brazil Hengtong

Brazil

Middle East and North Africa Region

Algeria
Dubai (Bay sea area)
Egypt
Jordan
Lebanon
Morocco (West Africa&North Africa Region)

Europe Region

Baltic
Georgia
Italy
Poland
Serbia
Turkey
Ukraine

Russia Region

Russia

Domestic Representative Offices

Hengtong (Beijing) Representative Office

Room B1803, Digital Building, No. 2 Zhongguancun South Avenue, Haidian District, Beijing, China
Tel: 010-51626988
Fax: 010-51626998

Hengtong (Guangdong) Representative Office

Room 1402, Bldg A, Fengxing Plaza, No. 67, Tianhe East Road, Tianhe District, Guangzhou, Guangdong Province, China
Tel/Fax: 020-87599616

Hengtong (Zhejiang) Representative Office

Room 1002, Huayuan Development Building, No. 639, Jianguo North Road, Xiacheng District, Hangzhou, Zhejiang Province, China
Tel/Fax: 0571-85392807

Hengtong (Hunan) Representative Office

Rooms 2118 and 2119, Business Building, Dahua Hotel, Dongtang, No. 528, Laodong West Road, Yuhua District, Changsha, Hunan Province, China
Tel/Fax: 0731-89710847

Hengtong (Henan) Representative Office

Room 1909, Tower A, Guomao Building, Garden Road (Southwest of the intersection with Nongye Road), Jinshui District, Zhengzhou, Henan Province, China
Tel/Fax: 0371-65720119

Hengtong (Guizhou) Representative Office

Room 704, Bldg A, Quanlin International Plaza, No. 196, Fushui South Road, Nanming District, Guiyang, China

Hengtong (Liaoning) Representative Office

Room 66-B-10C, No. 225, Youth Street, Shenhe District, Shenyang, China
Tel/Fax: 0451-51444018

Hengtong (Luoyang) Representative Office

Room 5-2-701, Zhongfu Jinyuan Community, Qianjing South Road, Jianxi District, Luoyang, China

Hengtong (Shanghai) Representative Office

12/F, Bldg A, Far East International Plaza, No. 319, Xianxia Road, Shanghai, China
Tel: 021-32084666-8030
Tel: 021-32084666-8072

Hengtong (Shenzhen) Representative Office

Rooms A703 and A503, Ruijingge, Hongrui Garden Community; and Room 2B, Bldg B, Lantiange, Xililantian Garden Community, Shenzhen, China
Tel/Fax: 020-87599616

Hengtong (Jiangsu) Representative Office

Room 602, No. 8, Huju South Road, Nanjing, Jiangsu Province, China
Tel: 025-83464575
Fax: 0512-63800538

Hengtong (Hubei) Representative Office

Room 1-2-604, Taiyin Building, No. 1, Changning Community, Changqing Road, Jiangnan District, Wuhan, Hubei Province, China
Tel/Fax: 027-82647420

Hengtong (Hebei) Representative Office

Room 1-A9, 1/F, Attached Bldg, Fortune Center, No. 86, Guang'an Street, Chang'an District, Shijiazhuang, Hebei Province, China
Tel/Fax: 0311-66159890

Hengtong (Yunnan) Representative Office

15/F, Tower C, No. 96, Beijing Road, Kunming, China
Tel/Fax: 0871-65640310

Hengtong (Heilongjiang) Representative Office

Room 1-1-510, No. 146, Dongdazhi Street, Nangang District, Harbin, China
Tel/Fax: 0451-51444018

Hengtong (Tianjin) Representative Office

Room 609, Bldg 3, Yitian Garden Community (West of the intersection of Baotou Avenue and Xizang Road), Nanmenwai Street, Heping District, Tianjin, China
Tel/Fax: 022-23450605

Hengtong (Fujian) Representative Office

Room 2203, Lippo Tianma Plaza, No. 1, Wuyi North Road, Gulou District, Fuzhou, China
Tel/Fax: 0591-83314244

Hengtong (Jiangxi) Representative Office

Room 1508, Nanbin International Financial Building, Nanchang, Jiangxi Province, China
Tel/Fax: 0791-86255821

Hengtong (Shandong) Representative Office

Room 910, Bldg A, Wanda Plaza, Jingsi Road, Shizhong District, Jinan, Shandong Province, China
Tel: 0531-81766682
Fax: 0531-81766683

Hengtong (Shaanxi) Representative Office

Room 12507, Bldg 13-1 (2507, Langchen Building), Gaoxin 4th Road, High-tech Zone, Xi'an, China
Tel/Fax: 029-88339411

Hengtong (Gansu) Representative Office

Room 1303, 13/F, Bldg C, Century Plaza, No. 352, Qingyang Road, Chengguan District, Lanzhou, China
Tel/Fax: 0931-8824359

Hengtong (Jilin) Representative Office

Room 1401, Bldg C46, Changchunmingzhu Community, No. 8668, Renmin Street, Nangan District, Changchun, China
Tel/Fax: 020-87599616

Hengtong (Chongqing) Representative Office

Room 7-2, No. 1, Fortune Avenue, Yubei District, Chongqing, China
Tel/Fax: 023-68691819

Hengtong (Guangxi) Representative Office

Room 906, Tower E, Huidong International Building, Jinpu Road, Qingxiu District, Nanning, Guangxi, China
Tel/Fax: 0771-5717234

Hengtong (Anhui) Representative Office

Rooms 2527, 2528 and 2529, East Community, Impression West Lake Garden, Wangjiang West Road, Shushan District, Hefei, China
Tel/Fax: 0551-65622957

Hengtong (Shanxi) Representative Office

No. 2 Jiefang South Road, Yingze District, Taiyuan, Shanxi Province, China
Tel/Fax: 0351-4605240

Hengtong (Sichuan) Representative Office

Times 8 (No. 2, Bldg 33), No. 68, Zhiquanduan, East Street, Jinjiang District, Chengdu, Sichuan Province, China
Tel/Fax: 028-84455529

Hengtong (Xinjiang) Representative Office

Room H, 14/F, Tower B, Times Square, No. 30, Guangming Road, Tianshan District, Urumqi, Xinjiang, China
Tel/Fax: 0991-4529183

Hengtong (Inner Mongolia) Representative Office

Room 1051-16, 5/F, Changxing Building, Daxue West Street, Saihan District, Hohhot, Inner Mongolia, China
Tel/Fax: 0471-3396565